


MAX CUT

TECHNICAL DATA SHEET



REFERENCE: #11003
#11004

Sizes:

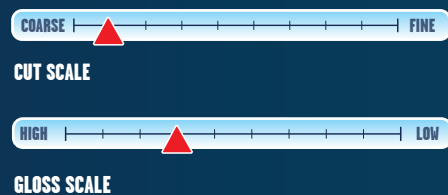

TECHNICAL DATA:

- Flash Point: >200F (>93.3C)
- Appearance: White
- Physical State: Thick pourable liquid
- Odor: Characteristic
- Specific Gravity: 1.05g/cm³, 8.75 lb/US Gal (H₂O = 1)
- Dangerous Goods: Not regulated - US DOT, IATA, IMDG

DESCRIPTION:

Superb dust free compound, built around the same industry leading principles as its Max Cut 2.0 partner. Super easy to use, bu hand rotary or Dual Action machine, great self lubrication emulsion system. Watch the scratches, swirls and oxidation disappear instantly and permanently. Produces a wonderful deep shine and gloss with a wool, foam or microfiber pad.

DIRECTIONS OF USE:

Apply MAX CUT to a 3 ft. by 3 ft. cool surface area. Machine using appropriate 1200 to 1800 rpm and pressure. Gently polish the surface using a 10% overlapping pattern. Keep the applicator flat to the surface. Use a wool or aggressive foam pad for maximum cut. Wipe off residue with microfiber or soft towel.



1. Inspect surface. For removal of 1200 - 3000 grit sand scratches.



2. Attach clean, wool or foam pad, to the D.A. or Rotary machine.



3. Shake before use.



4. Apply to applicator and spread before starting machine.



5. Speed 1200 - 1800 rpm. For a DA mid to high speed and polish until the compounds almost disappears. Even stroke action. Clean pad to prevent build up.



6. Polish until almost removed. Use clean microfiber to remove excess.

HEALTH & SAFETY

Can cause eye irritation. Excessive inhalation may cause respiratory irritation. Ingestion can cause gastrointestinal irritation. Prolonged skin contact may cause slight irritation. Eyes: Flush with water for 15 minutes, call physician if irritation persists. Inhalation: Remove to fresh air, call physician if irritation persists. Ingestion: Do not induce vomiting, call physician.

